


Easitill II Deep Tillage

Digging Deep For Every Farmer

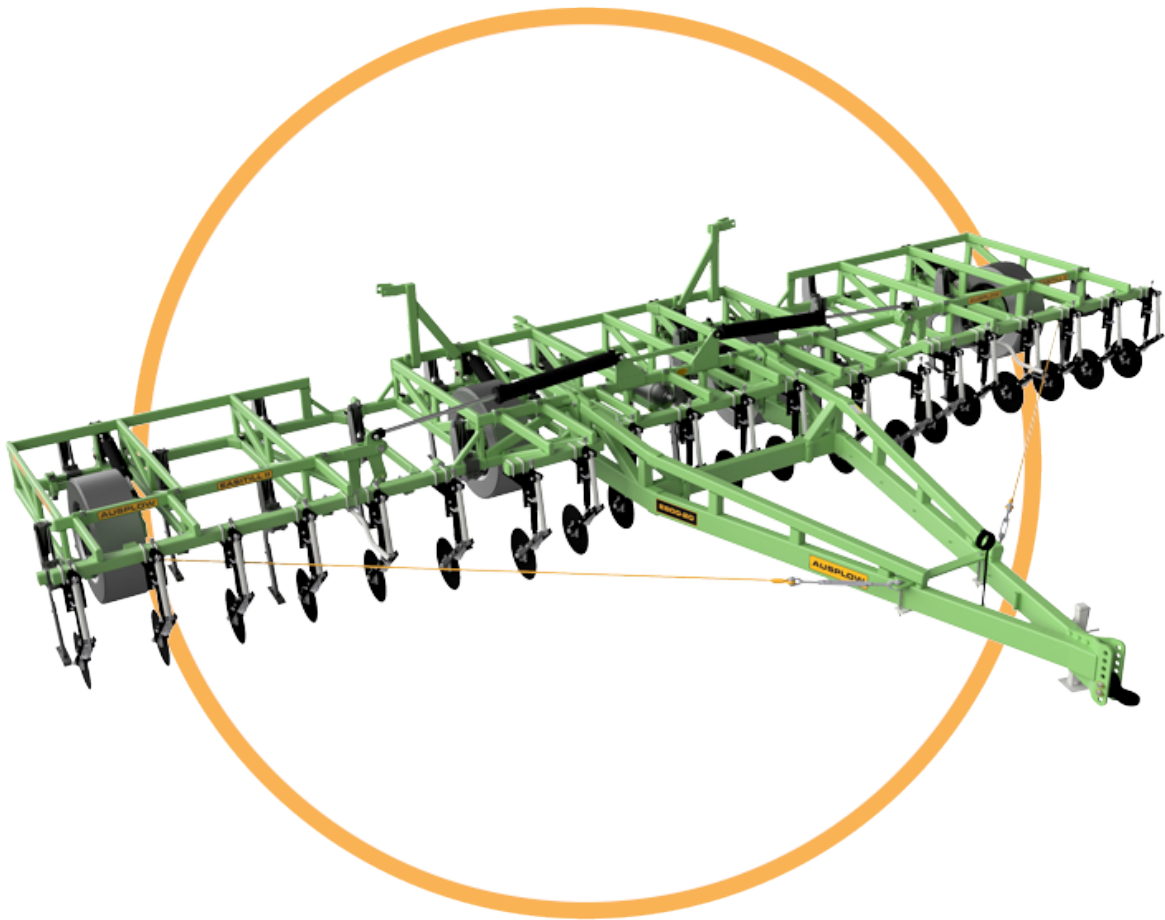

Higher yields from a deeper till.

Ausplow products are created for just one purpose: to increase your crop yields. Year after year. And better yields come from better soil. Soil that's porous, loose and deep with plenty of

organic matter and biological activity.

Conventional cultivation requires more tractor passes. And that creates the dreaded hard pans that can reduce your grain yield by up to a third. We conducted professional trials in sand plain in WA found that four passes of a tractor were enough to form a yield-crushing hardpan.

Our deep ripping approach removes traffic-induced hardpans and means plant roots can penetrate the ripped soil faster and deeper to absorb more soil moisture and capture more soil nutrients. And that means improved yield.

Watch the video

Download the spec sheet



MACHINE EASITILL II

Model	Wheels	Tine Spacing	Engine Power Kw / Hp	Dig Width M / Ft	Tpt Width M / Ft	Tpt Height M / Ft	Max Work Depth 750mm Shank	Max Work Depth 820mm Shank
E460								
E460-9	2	460mm	108 / 144	4.14 / 13'07"	4.24 / 13'11"	N/A / N/A	380	450
E460-11	2	460mm	132 / 176	5.06 / 16'07"	4.24 / 13'11"	N/A / N/A	380	450
E460-15	2	460mm	180 / 240	6.90 / 22'08"	6.90 / 22'08"	N/A / N/A	380	450
E460-21	4	460mm	252 / 336	9.66 / 31'08"	6.81 / 22'05"	3.42 / 11'03"	380	450
E460-23	4	460mm	276 / 368	10.58 / 34'09"	6.81 / 22'05"	3.82 / 12'07"	380	450
E460-27	4	460mm	324 / 432	12.42 / 40'09"	6.81 / 22'05"	5.13 / 16'10"	380	450
E460-29	4	460mm	348 / 464	13.34 / 43'09"	6.81 / 22'05"	5.19 / 17'01"	380	450
E520								
E520-5-3PL	2	520mm	60 / 80	2.27 / 7'05"	2.27 / 7'05"	N/A / N/A	380	450
E520-5-TR	2	520mm	60 / 80	2.27 / 7'05"	2.27 / 7'05"	N/A / N/A	380	450
E520-11	2	520mm	131 / 176	5.72 / 18'09"	5.81 / 19'06"	N/A / N/A	380	450
E520-23	4	520mm	276 / 368	11.96 / 39'03"	7.63 / 25'01"	4.17 / 13'09"	380	450
E600								
E600-5-3PL	2	600mm	60 / 80	3.00 / 9'11"	2.58 / 8'06"	N/A / N/A	380	450
E600-5-TR	2	600mm	60 / 80	3.00 / 9'11"	2.58 / 8'06"	N/A / N/A	380	450
E600-8	2	600mm	95 / 128	4.80 / 15'09"	4.88 / 16'01"	N/A / N/A	380	450
E600-20	4	600mm	238 / 320	12.00 / 39'04"	7.07 / 23'02"	4.54 / 14'11"	380	450

About The Easitill II

If conditions allow, the Easitill II traditional deep tillage machine is proven to be capable of working to depths of 380mm (15") with the 750mm edge-on shank. In sand plain soil conditions, it works to depths of 450mm using the 820mm edge-on shank to.

Our forged edge-on shank is 20mm wide x 90mm deep and is designed to not invert the soil, which means very little topsoil disturbance. Everything topside stays intact.

Easitill 2 uses a similar frame to the Deep Blade System (DBS) Auseeder, but does not use the rear add on tool bar. Instead, the three rows of tines are mounted within the main frame.

Works With Min-Till Too.

Minimum tillage seeding and deep ripping go hand in hand. Min-till seeding is worthwhile after ripping because it reduces erosion risk and helps the effect of deep ripping last longer.

Numbers of Models

15

Tine Spacings Available

**460mm (18"), 520mm (20"),
600mm (24")**

Underframe Clearance

750mm (29.5")

Maximum Breakout Force

650kgs (1430lbs) @ 1450psi pressure

Working Widths

4.14m to 13.34m

All Models Fitted With:

- Hydraulic tines coupled to a central nitrogen accumulator.
- Optional single coulters.
- Tines are protected from wear with replaceable shin guards and tungsten tipped blades.

Specifications

Machine Easitill II

Model	Wheels	Tin Spacing	Engine Power Kw / Hp	Dig Width M / Ft	Tpt Width M/Ft	Max Work Depth 750mm Shank	Max Work Depth 820mm Shank
E460							
E460-9	2	460mm	108 / 144	4.14 / 13'07"	4.24 / 13'11"	380	450
E460-11	2	460mm	132 / 176	5.06 / 16'07"	4.24 / 13'11"	380	450

Model	Wheels	Tin Spacing	Engine Power Kw / Hp	Dig Width M / Ft	Tpt Width M/Ft	Max Work Depth 750mm Shank	Max Work Depth 820mm Shank
E460-15	2	460mm	180 / 240	6.90 / 22'08"	6.90 / 22'08"	380	450
E460-21	4	460mm	252 / 336	9.66 / 31'08"	6.81 / 22'05"	380	450
E460-23	4	460mm	276 / 368	10.58 / 34'09"	6.81 / 22'05"	380	450
E460-27	4	460mm	324 / 432	12.42 / 40'09"	6.81 / 22'05"	380	450
E460-29	4	460mm	348 / 464	13.34 / 43'09"	6.81 / 22'05"	380	450
E520							
E520-5-3PL	2	520mm	60 / 80	2.27 / 7'05"	2.27 / 7'05"	380	450
E520-5-TR	2	520mm	60 / 80	2.27 / 7'05"	2.27 / 7'05"	380	450
E520-11	2	520mm	131 / 176	5.72 / 18'09"	5.81 / 19'06"	380	450
E520-23	4	520mm	276 / 368	11.96 / 39'03"	7.63 / 25'01"	380	450
E600							
E600-5-3PL	2	600mm	60 / 80	3.00 / 9'11"	2.58 / 8'06"	380	450
E600-5-TR	2	600mm	60 / 80	3.00 / 9'11"	2.58 / 8'06"	380	450
E600-8	2	600mm	95 / 128	4.80 / 15'09"	4.88 / 16'01"	380	450

Model	Wheels	Tin Spacing	Engine Power Kw / Hp	Dig Width M / Ft	Tpt Width M/Ft	Max Work Depth 750mm Shank	Max Work Depth 820mm Shank
E600-20	4	600mm	238 / 320	12.00 / 39'04"	7.07 / 23'02"	380	450
Model	Wheels	Tin Spacing	Engine Power Kw / Hp	Dig Width M / Ft	Tpt Width M/Ft	Max Work Depth 750mm Shank	Max Work Depth 820mm Shank
E460							
E460-9	2	460mm	108 / 144	4.14 / 13'07"	4.24 / 13'11"	380	450
E460-11	2	460mm	132 / 176	5.06 / 16'07"	4.24 / 13'11"	380	450
E460-15	2	460mm	180 / 240	6.90 / 22'08"	6.90 / 22'08"	380	450
E460-21	4	460mm	252 / 336	9.66 / 31'08"	6.81 / 22'05"	380	450
E460-23	4	460mm	276 / 368	10.58 / 34'09"	6.81 / 22'05"	380	450
E460-27	4	460mm	324 / 432	12.42 / 40'09"	6.81 / 22'05"	380	450
E460-29	4	460mm	348 / 464	13.34 / 43'09"	6.81 / 22'05"	380	450
E520							
E520-5-3PL	2	520mm	60 / 80	2.27 / 7'05"	2.27 / 7'05"	380	450
E520-5-TR	2	520mm	60 / 80	2.27 / 7'05"	2.27 / 7'05"	380	450

Model	Wheels	Tin Spacing	Engine Power Kw / Hp	Dig Width M / Ft	Tpt Width M/Ft	Max Work Depth 750mm Shank	Max Work Depth 820mm Shank
E520-11	2	520mm	131 / 176	5.72 / 18'09"	5.81 / 19'06"	380	450
E520-23	4	520mm	276 / 368	11.96 / 39'03"	7.63 / 25'01"	380	450
E600							
E600-5-3PL	2	600mm	60 / 80	3.00 / 9'11"	2.58 / 8'06"	380	450
E600-5-TR	2	600mm	60 / 80	3.00 / 9'11"	2.58 / 8'06"	380	450
E600-8	2	600mm	95 / 128	4.80 / 15'09"	4.88 / 16'01"	380	450
E600-20	4	600mm	238 / 320	12.00 / 39'04"	7.07 / 23'02"	380	450